



# Specifications

# E040 501X

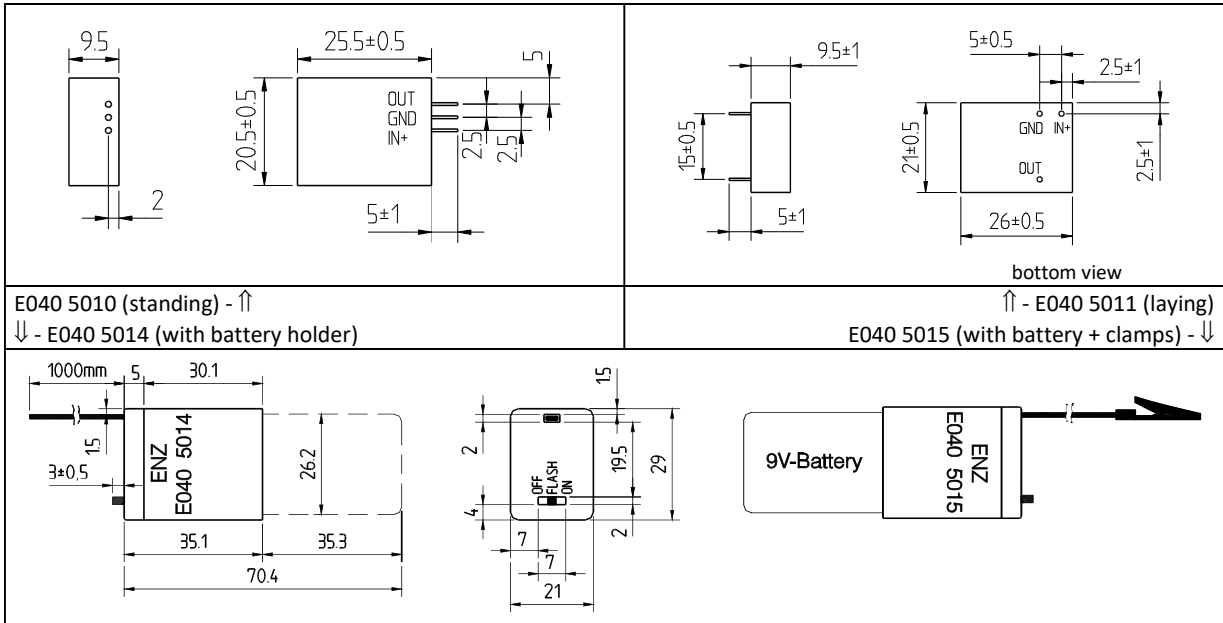

Nominal Input Voltage	9VDC	Nominal illum. surface	100cm <sup>2</sup>
Output Voltage	60-180VAC	Storage temperature	-30°C - +80°C
Frequency	340-790Hz	Operating temperature	-10°C - +70°C

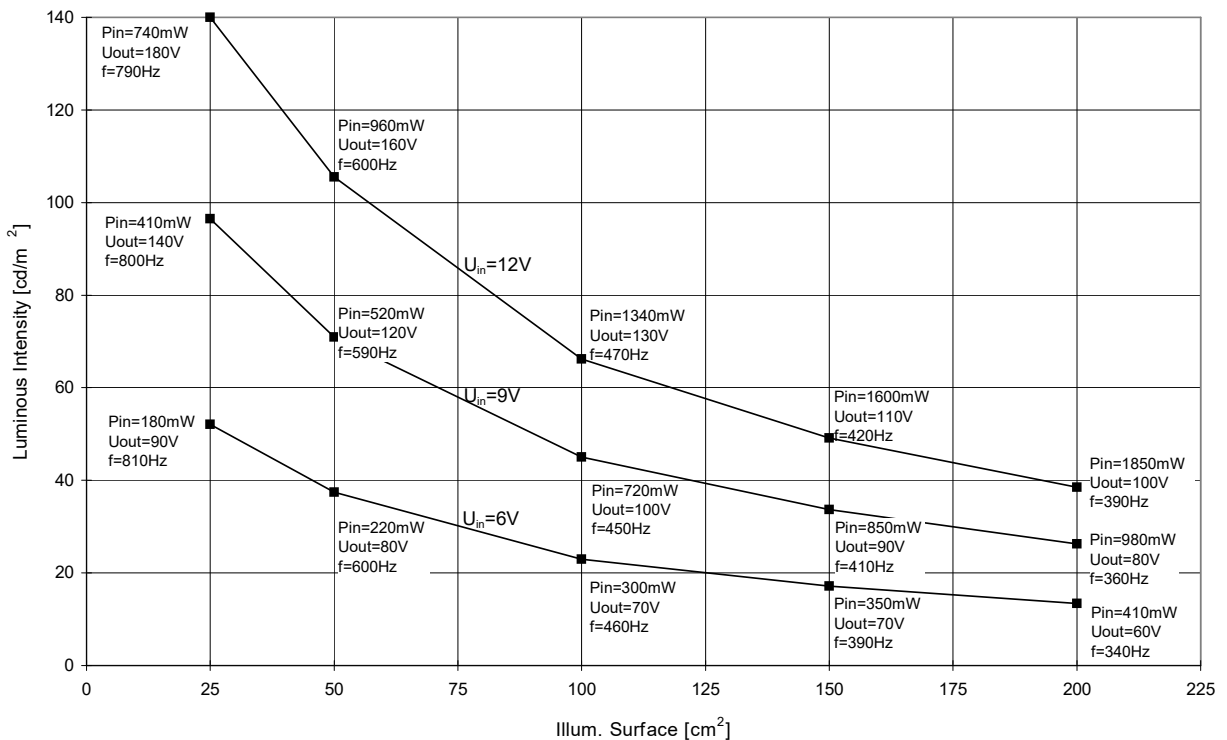

The measurement values on the above diagram are based on the following EL-datas:

ELF 2006	Colour	green-blue
	Emission max.	500nm
ROHS compliant	C passive	0.25 nF/cm <sup>2</sup>
	C active	0.39 nF/cm <sup>2</sup> @ 100V 400Hz

**Caution: Running on the spot or short circuit can damage the EL-Driver!**

ENZ-Electronic Ltd.  
Strahlholz 13  
CH-9056 Gais/Switzerland

Tel.: ++41 71/793 31 31  
Fax: ++41 71/793 31 35  
E-Mail: mail@enz.ch - http://www.enz.ch

Subject to change  
DATSSABI\_E040\_501X\_E  
E/A:06.08.19 / RT  
G+F:06.08.19 / RT