



Type	E410 0011	E410 0021
Voltage	AC 100 – 240V	AC 100 – 240V
Frequency	50 – 60Hz	50 – 60Hz
Power	33 W	33 W
Power Factor	110V \geq 0.95 / 220V \geq 0.9	110V \geq 0.95 / 220V \geq 0.9
Color	cool white	warm white
Color Temperature	6000 K (approx.)	3000 K (approx.)
Light Source	SMD LED 132 pieces	SMD LED 132 pieces
Initial Lumen	>2400 lm	>2000 lm
Color Rendering Index	Ra 70	Ra 70
Beam Angle	150°	150°
Operating Temperature	-10°C to +45°C	-10°C to +45°C
Operating Humidity	20% to 90% RH	20% to 90% RH
Storage Temperature	-20°C to +80°C	-20°C to +80°C
Storage Humidity	10% to 95 RH	10% to 95% RH
Dimensions	600 x 600 x 32mm	600 x 600 x 32mm
Material	Steel paint / PC	Steel paint / PC
Life	>30'000h	>30'000h
Weight	2'200g (approx.)	2'200g (approx.)

Spezifikationen E410 0011 / 21

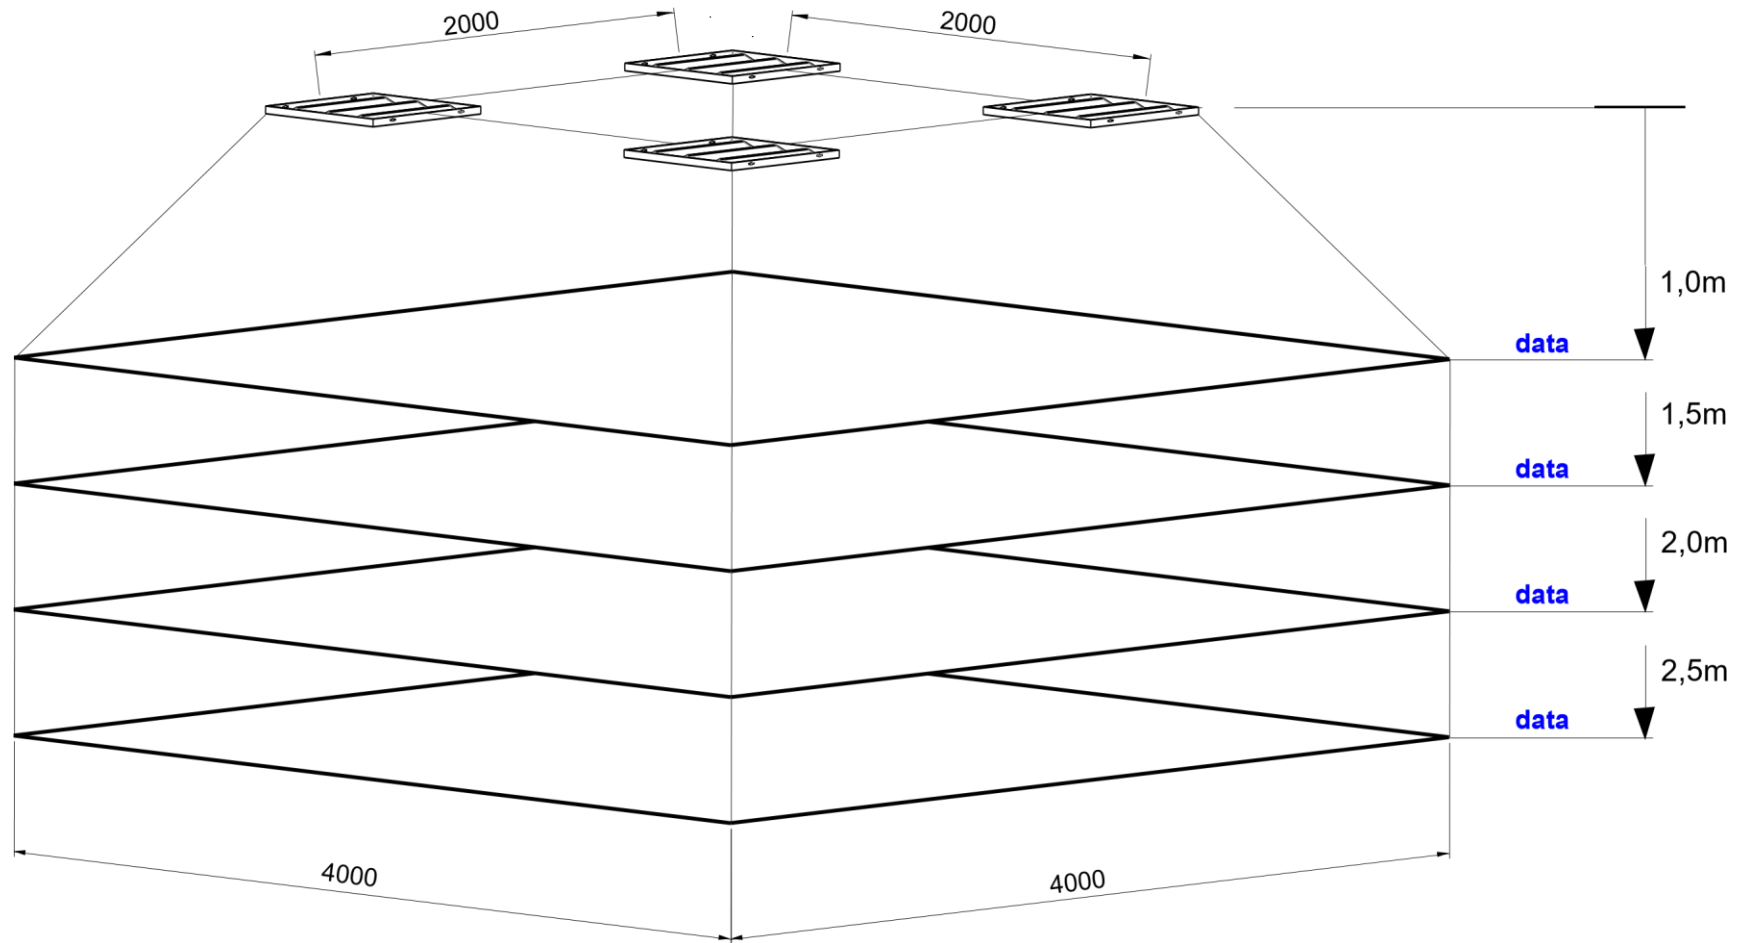


data on request

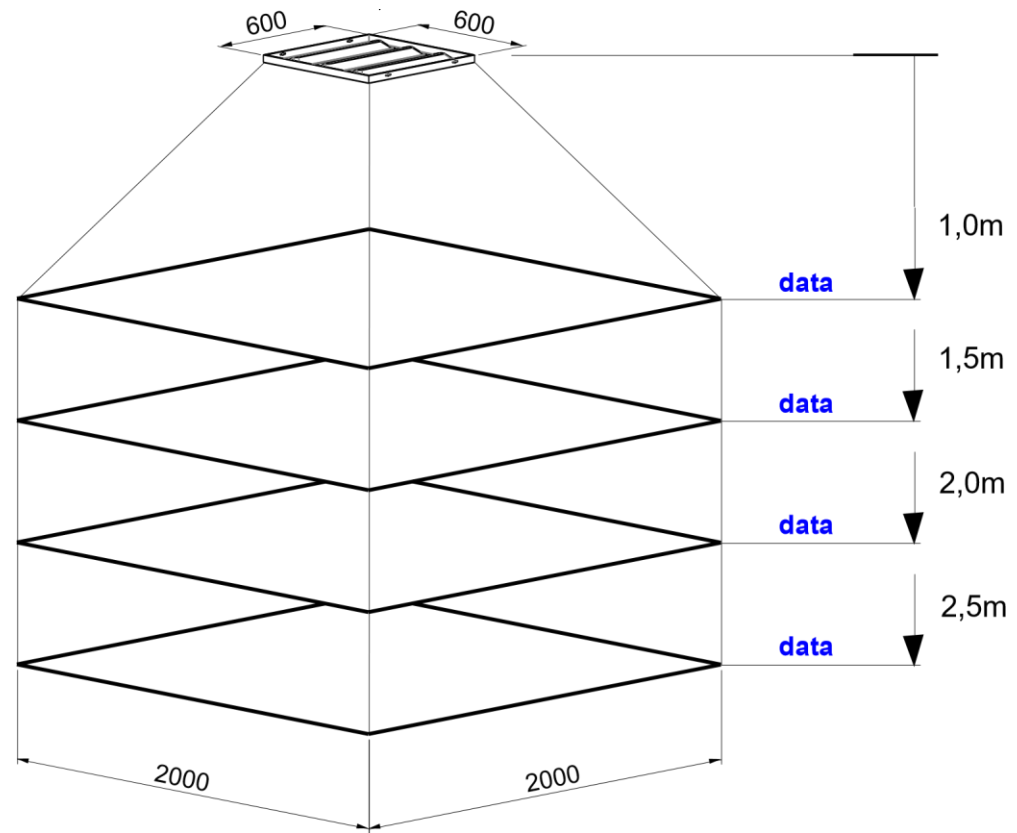

data on request

Spezifikationen E410 0011 /21

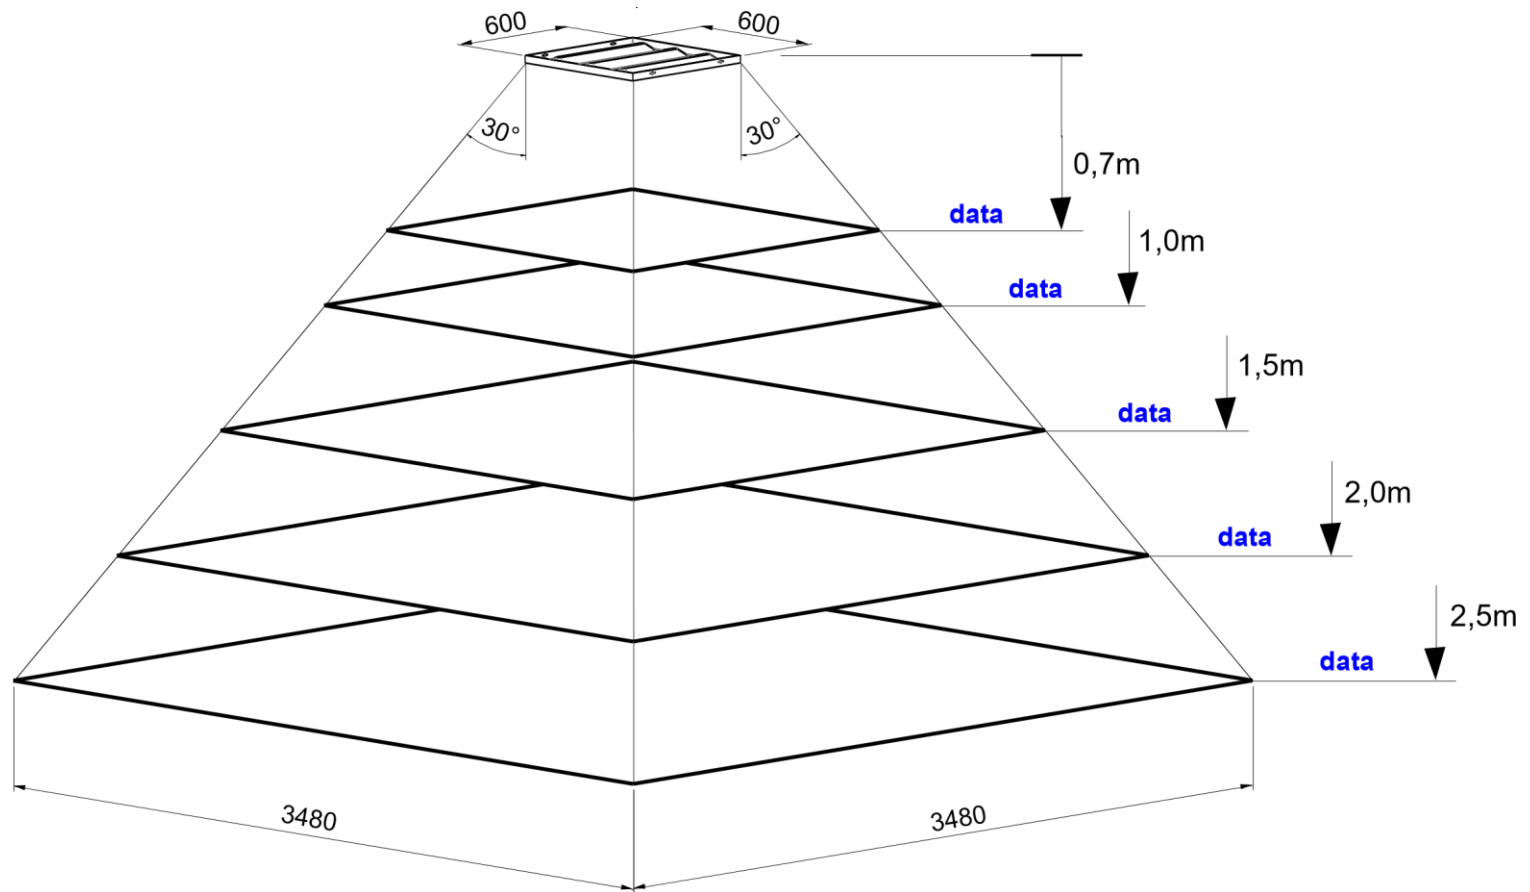

data on request